

Ring Power®



SERVICE & LUBE TRAILERS

FRESH OIL | RECLAIM | DIESEL | COOLANT | DEF | GREASE



AN AFFORDABLE APPROACH TO SERVICE


A Thunder Creek Service and Lube Trailer gives equipment managers the flexibility to customize a service and PM solution that is considerably less costly to own and operate than a comparably-equipped lube truck.

The trailer's primary fluid tanks can be 25-, 55-, and 110-gallon capacities (440 gallon combined) for fresh oils, used oil reclaim, diesel, and coolant. In addition, the trailer can also be equipped with a grease delivery system as well a closed DEF delivery system to maintain purity in off-road environments.

Pneumatic pumping systems can be powered via an on-board air compressor, compressor/generator, welder/compressor/generator; or an air line can be plumbed through the front hitch to utilize an external air supply.

The Service & Lube Trailer can be configured in a way to eliminate the need for the driver to carry a CDL or a HAZMAT endorsement. All together, it's one of the most comprehensive field maintenance solutions available to heavy equipment fleet operations.

**WORKS LIKE
A LUBE
TRUCK AT A
FRACTION OF
THE COST**

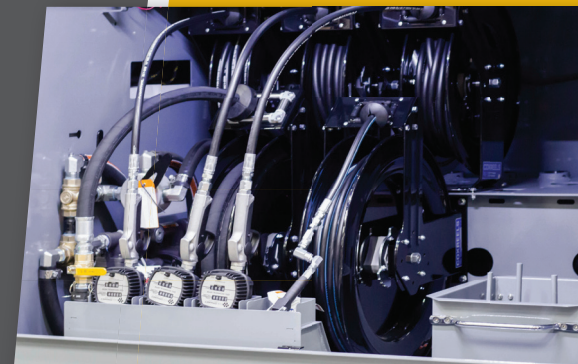




FUEL | DEF | SERVICE | LUBE

Thunder Creek's industry-leading solutions for maintaining off-road equipment are available at Ring Power.

RINGPOWER.COM | 833-269-4479

Ring Power®

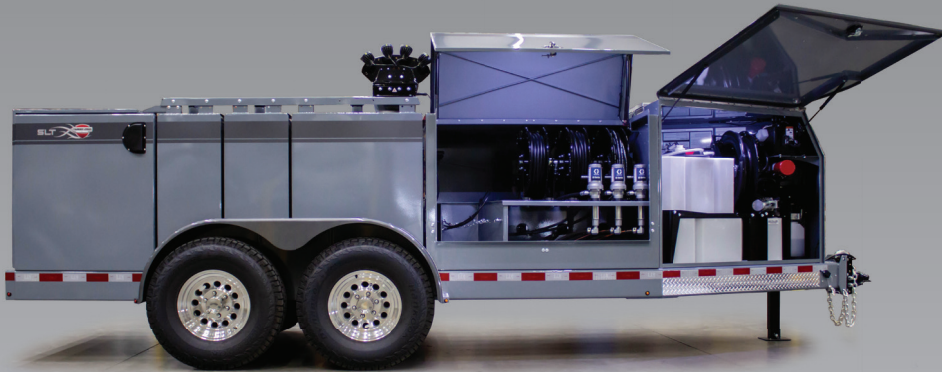

STANDARD FEATURES 3 YEAR TANK WARRANTY

TANK FEATURES

- Maximum of 8 Main Fluid Systems (see right)
- Configurations of 25-, 55- and 110-Gallon Tanks
- 10 Gauge Commercial or Stainless Steel Tanks
- 440 Gallon Combined Capacity
- Locking, Vented Caps
- Tank Level Gauges

TRAILER FEATURES

- 7.5" x 1/4" Formed Frame
- Dexter® Torsion Axles and EZ Lube Hubs
- Electric Brakes with Breakaway Safety System
- 16" 10-Ply Tires 235 / 80R16 with Steel Wheels
- Replaceable Bolt-On Fenders
- Replaceable Diamond Plate Rock Guard
- 8,000 lb. Enclosed Jack
- Safety Tow Chains
- Adjustable Height 2 5/16" Ball Hitch
- Reflective Tape and LED Lights
- Wiring Wrapped in Protective Braid
- Dual Coat Gray Polyurethane Paint

ENCLOSURE FEATURES

- Lockable Hatch-Style, Weather-Sealed Doors
- Automatic Interior LED Lighting
- Designed for Ease of Access
- 12V Deep Cycle Marine Battery
- Fire Extinguisher
- Used Filter Drain Pan

OPTIONS

- WorkSight Light Tower
- Electric / Hydraulic Jack
- Field Max Tires 16" 10-Ply 285 / 80R16 Tires
- Spare Tire Kit with Standard or Field Max Tire
- Aluminum Wheels
- Stainless Steel Fender + Trim Upgrade
- Custom Paint Color
- Solar Battery Maintainer
- Spill Containment Kit
- 5 Drawer Tool Chest for Front Enclosure
- 5 Drawer Tool Chest for Rear Utility Box
- 2 Drawer Low Boy Tool Chest
- Work Bench with Vise
- Can + Towel Holder

SPECIFICATIONS

Thunder Creek Model #	SLT440
Tanks	440 gallon combined capacity 10 gauge
Torsion Axles Hubs	dual 7,000 lbs. 8 bolt hubs
L W H	20' 1" 6' 9" 5' 9"
Empty Weight GVWR	6,800 lbs. 14,000 lbs.



MAIN FLUID SYSTEMS

USED OIL SYSTEM

- 25' Retracting Reel, 1" Hose
- 4 Way Valve to Empty/Fill with Single Pump
- Air Diaphragm Trash Pump
- Able to Connect Multiple Tanks

OIL SYSTEM

- 50' Retracting Reel, 1/2" Hose
- Air Piston Pump Options Available
- Metered Analog Nozzle Standard, Digital Available

COOLANT SYSTEM

- 50' Retracting Reel, 1/2" Hose
- Air Diaphragm Pump
- Stainless Steel Tank Standard
- Metered Analog Nozzle Standard, Digital Available


ADDITIONAL FLUIDS

GREASE SYSTEM

- Located in Pump Enclosure
- 35 lb. or 120 lb. Systems Available
- 75' Retracting Reel, 3/8" Hose
- Air Piston Pump

DIESEL EXHAUST FLUID SYSTEM

- Located in Front Enclosure
- 100 Gallon DEF Tank, Closed 2-in-1 Pumping System and 35' Reel
- 12V Pump
- Digital DEF Meter Available
- 50' DEF Hose Reel Upgrade
- Heaters Available

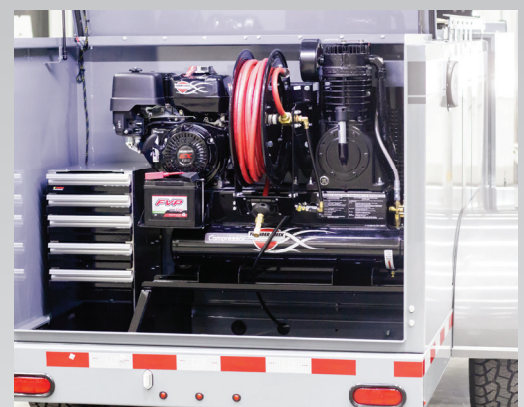

PNEUMATIC SYSTEMS

- Welder+Comp+Gen with 50' Air/Elec. Combo Reel
- Comp+Gen with 50' Air/Elec. Combo Reel
- 35 CFM Air Compressor with 50' Air Hose Reel
- Air Line Plumbed through Hitch (External Air Supply)